

GOLDEN APARTMENTS

COMPLETE RENOVATION PROJECT

2312 N. Golden Ave

San Bernardino, CA 92404

SUPPLEMENT TO LIGHTING SPECIFICATIONS

Provided by:

Joe Thrailkill, *Certified Lighting Consultant*

**Lighting Supply Guy**
Your Partner for Energy Efficient Lighting

5 Holland, #219 | Irvine CA 92618

Office 949-589-3020 | **Fax** 949-858-3522

Authorized Supplier

GOLDEN APARTMENTS - REVISED LIGHT FIXTURE SPECIFICATIONS WITH ALTERNATES

Approx. Qty	Fixture Type	Original Manf., Part Number & Specs	Estimated Price Per Unit	Total Price	Potential Alternate Manf., Part Number & Specs	Estimated Price Per Unit	Total Price
8	A	BROWNLEE CAT #7590-AB-B12LED-30K WALL MOUNT WITH 12W LED BAR, 8.25"Wx13"Hx6"D, UL LISTED FOR WET LOCATION, 3000K, ANTIQUE BRONZE, 1422 LUMENS	\$295.00	\$2,360.00	As specified	\$295.00	\$2,360.00
33	AE	BROWNLEE CAT# 1390-AB-B12LED-WA-30K-BBI-TBC ADA WALL MOUNT, WITH 12W LED BAR, 8"Wx13"Hx4"D, UL LISTED FOR DAMP LOCATION, INTEGRAL BATTERY BACK UP AND FIXTURE REMAIN 4"D ADA, 3000K, ANTIQUE BRONZE WITH TOP AND BOTTOM COVER, 1422 LUMENS	\$385.00	\$12,705.00	As specified	\$385.00	\$12,705.00
3	B	LITHONIA CAT#WST-LED-P2-30K- SR3-MVOLT-PIR - DDBXD ARCHITECTURE SCENCE WITH LENS W/ (1) 25W LED LAMP, 0-10VDC DIMMABLE LED DRIVER, BUILT-IN MOTION SENSOR THAT SETS NO MOTION TO 3VDC (37% LIGHT), AND 100% FULL MOTION, UL LISTED FOR WET LOCATION, DARK BRONZE, FORWARD THROW, 8.5"Hx17"Wx10.3"D, 20 lbs. 3237 LUMENS	\$443.00	\$1,329.00	As specified	\$443.00	\$1,329.00
1	BE	LITHONIA CAT#WST-LED-P2-30K- SR3-MVOLT-PIR - DDBXD-E7WC SAME TYPE LIKE "B" EXCEPT W/ BUILT-IN EMEREGNCY LED DRIVER, 7W	\$785.00	\$785.00	As specified	\$785.00	\$785.00
39	C	PROGRESS LIGHTING CAT NO " CAT NO P7251-0930K9, 32"Lx18"Wx4.4"D SURFACE OVAL FIXTURE WITH INTEGRAL LED LAMPS. BRUSHED NICKEL, UL LISTED FOR DAMP LOCATION, 3000K, 90 CRI, 2649 LUMENS, T24 APPROVED, AND IS INCLUDED IN T24 DATA BASE	\$204.00	\$7,956.00	UTOPIA LIGHTING CAT NO CO2 32 3/8"Lx18Wx4 7/32"D SURFACE OVAL FIXTURE WITH INTEGRAL LED LAMPS. SATIN NICKEL, ETL LISTED, 3000K, CRI: >90, 4322 LUMENS, TITLE 24, DIMMING CONTROL 1-10V	\$107.00	\$4,173.00
19	D	LITHONIA CAT#STL4-40L-EZ1-LP835 10"x4'x4"D LED VOLUMETRIC, WITH PRISMATIC LENS, 3500K, 3834 LUMENS, AND 0-10VDC DIMMING, UL LISTED FOR DAMP LOCATIONS, LPW 109	\$232.00	\$4,408.00	As specified	\$232.00	\$4,408.00
3	E	LITHONIA CAT# LESW1OR2G120/277ELN DIE-CAT ALUMINUM EXIT SIGN, LED TYPE, UNIVERSAL MOUNTING, WITH EMERGENCY CIRCUIT, SINGLE OR DOUBLE FACE, WITH MIN. 90 MINUTES BATTERY PACK, SEE ARCHITECTURE FOR EXACT FACE TYPE	\$211.00	\$633.00	As specified	\$211.00	\$633.00
17	F	NORA LIGHTING CAT NO NC-631-L20-35-W-WSF 6" RECESSED LED SAPPHIRE SERIES DOWNLIGHT, WITH LED REFLECTOR 3500K AND SPECULAR CLEAR REFLECTOR TRIM MODEL NO, 0-10VDC DIMMING, 1685 LUMENS, UL LISTED FOR DAMP LOCATION	\$129.00	\$2,193.00	As specified	\$129.00	\$2,193.00
7	FE	NORA LIGHTING CAT NO NCH63020LE1EM SAME AS "F", EXCEPT WITH EMERGENCY LED DRIVER 565 LUMEN EMERGENCY LED DRIVER	\$276.00	\$1,932.00	As specified	\$276.00	\$1,932.00

23	G	KICHLER LIGHTING CAT NO 11149NILED 25.5" WIDE VANITY FIXTURE WITH INTEGRAL LED LAMPS. BRUSHED NICKEL , UL LISTED FOR DAMP LOCATION, 3000K, 90 CRI, 1440 LUMENS, T24 APPROVED, AND IS INCLUDED IN T24 DATA BASE	\$92.00	\$2,116.00	LUMINANCE CAT NO F8724-80 25 3/8" WIDE VANITY FIXTURE INTEGRAL LED LAMPS. BRIGHT SATIN NICKEL. 3000k, 90 CRI, 24W, 1750 LUMANS. DAMP RATED,	\$73.00	\$1,679.00
241	H	HALO CAT SLD612-80-30-WH-UNV-JB 6" SURFACE LED DOWNLIGHT, MOUNTED IN 4" JUNCTION BOX, 7.79" ROUND BY 0.8" DEEP, WITH WHITE TRIM MODEL NO SLD6TRMWH, TITLE 24 CERTIFIED, 80 CRI, 3000K, AND 0-10VD DIMMING, 1215 LUMENS, UL LISTED FOR DAMP LOCATION	\$59.00	\$14,219.00	HALCO CAT SDL6FR11/830/LED2 99872 6" SURFACE LED DOWNLIGHT, MOUNTED IN EXISITING RECESSED OR J BOX, WITH WHITE TRIM. ENERGY STAR LISTED, 80 CRI, 3000K, DIMMABLE, 920 LUMENS, UL LISTED FOR DAMP LOCATIONS.	\$14.00	\$3,374.00
1	I	BROWNLEE CAT# 7602-AB-B12LED-VBO-30K-BBI WALL MOUNT, WITH 12W LED BAR, 9"Wx15"Hx5.5"D, UL LISTED FOR WET LOCATION, INTEGRAL BATTERY BACK UP, 3000K, ANTIQUE BRONZE, 1422 LUMENS	\$365.00	\$365.00	As specified	\$365.00	\$365.00
			\$51,001.00		\$35,936.00		



C7 LED

LED LUNA

APPLICATION

Suitable for corridor, living room and bedroom.

FEATURES:

- UV-resistant opal white acrylic diffuser and with twin steel ring surround design. Die-formed cold-roll steel back plate and lens holding band trim.
- Brushed nickel finish.

LED:

- 3000K color temperature standard.
- 70 lm/w LED.
- CRI: >80
- 50,000 hours.

ELECTRICAL:

- Fixture for ambient minimum operating temperatures from -5°F (-20°C) / 105°F (40°C).
- Power Factor: >0.95
- Input Voltage: 120Vac, 60Hz.

LISTING:

- ETL listed. (US, CANADA)
- Suitable for damp locations.
- 5 years limited warranty.
- Energy star listed. (pending)



APPLICATION

This decorative LED oval-shaped ceiling light is ideal for kitchens, workshops, offices and many other light commercial or residential settings.

FEATURES:

- Satin nickel finish, opal white diffuser, and oval shape.
- Contemporary style flushmount oval ceiling.
- Suitable for surface mounting.
- Frosted PC Diffuser.

LED:


- 3000K color temperature standard.
- LED WATTAGE: 53W
- CRI: >90
- Nominal Lamp Life: 100,000 hours
- Reported L70 hours: +73,000 (51.2°C)
- Rated R9 Value: 10

ELECTRICAL:

- Fixture for ambient minimum operating temperatures from -4°F (-20°C) to 113°F (45°C).
- Power Factor: >0.90
- Dimming Control: 1-10V (10%~100%)
- Input Voltage: 120V- 277V, 60Hz.

LISTING:

- ETL listed. (US, CANADA)
- 5 years limited warranty.
- JA8 Compliant
- Title 24



Specifications: C7-12-15LED

Diameter: 12 (304)
Height: 3 (76)

Specifications: C7-16-23LED

Diameter: 16 (406)
Height: 3-1/2 (87)

All dimensions are in inches (millimeters).

	LED WATTS	LUMEN OUTPUT	LUMEN EFFICIENCY
C7-12-15ALE	15W	1050 lm	70 lm/w
C7-16-23LED	25W	1750 lm	70 lm/w

ORDERING INFORMATION

EXAMPLE: C7-12-15ALE/30-120-DM

MODEL	LED	COLOR TEMP.	VOLTAGE	DIMMING
C7-12	12" Dia 15ALE 15 Watts Power	/30 3000K (Std.)	120 120V (Std.)	DM Triac Dimming (Std.)
C7-16	16" Dia 23LED 25 Watts Power			

OPTION

REM7	7W Remote EM ¹ (32°F (0°C) ~ 131°F (55°C))
------	--

NOTE:
1. Remote mount only available with 23LED.

CO2


LED 2-RING OVAL CEILING



Specifications:

Diameter: 18-9/32 (464)
Height: 4-7/32" (107)
Length: 32-3/8 (822)
Weight: 10.8 lbs (4.9 kg)

All dimensions are in inches (millimeters).

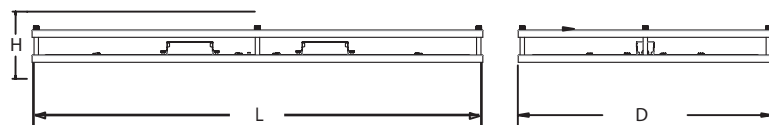

	LED WATTS	LUMEN OUTPUT	LUMEN EFFICIENCY
CO2	53W	4322 lm	83 lm/w

ORDERING INFORMATION

EXAMPLE: CO2-53LED/30-UNV-DM

MODEL	LED	COLOR TEMP.	VOLTAGE	DIMMING
CO2	32" 53LED 53 Watts Power	/30 3000K (Std.)	UNV 120-277V (Std.)	DM 1-10V Dimming (10%-100%)



SPECIFICATIONS	
ITEM NUMBER	F8724-80
DESCRIPTION	LED VANITY
FINISH	BRIGHT SATIN NICKEL - (80)
MOUNTING	WALL
CRI	90
CCT	3000K
WARRANTY	5 YR LIMITED
SUITABLE LOCATION	DAMP

ELECTRICAL	
LIFE HOURS	35,000
DIMMABLE	YES
SOURCE LUMEN	1750
DELIVERED LUMEN	1400
MAXIMUM WATTAGE	24W LED
VOLTS	120-277V WITH DRIVER

DIMENSIONS	
LENGTH	25-5/8"
WIDTH	4-3/4"
EXTENSION	4-1/4"

INFO
SATIN NICKEL STEEL HOUSING AND DIFFUSER

DESCRIPTION

The Halo Surface LED Downlight (SLD) incorporates WaveStream™ technology to create an ultra-low profile surface mounting luminaire with the performance and look of a traditional downlight. SLD6-1200 UNV series is designed for installation in many 4" x 2-1/8" deep square junction boxes. Accessory mounting kit allows retrofit in 5" and 6" IC and Non-IC recessed housings.* Suitable for residential or commercial installations. Ideal for closets, storage areas, attics and basements. Compliant with NFPA® 70, NEC® Section 410.16 (A)(3) and 410.16 (C)(5).

SPECIFICATION FEATURES

CONSTRUCTION

- Die cast aluminum trim ring, and die formed aluminum frame

OPTICS

- WaveStream™ technology provides uniform luminance from a low profile flat lens
- AccuAim™ optics provide directional control for the "cone-of-light" beam distribution of a traditional downlight.
- Precision molded lens features high transmission polymer with UV stabilized protecting film

DESIGNER TRIMS

Accessories (sold separately)

SLD designer trims are accessory rings that attach to the SLD for a permanent finish.* Refer to SLD accessories specification sheet for details.

- White (Paintable)
- Satin Nickel
- Tuscan Bronze

*SLD accessory trims attach with permanent adhesion and are not interchangeable after installation.

ELECTRICAL JUNCTION BOX MOUNTING

- SLD may be used in compatible electrical junction boxes in direct contact with insulation including spray foam insulation
- Suitable for installation in many 4" x 2-1/8" deep square electrical junction boxes.
- Driver consumes 3 cubic inches of junction box.
- Compatible with other junction boxes with accessory SLD6EXT extension spacer ring.
- Surface mounting in a fire-rated ceiling using an appropriate electrical box offers a cost-effective alternative to fire-rated recessed housings

Note: Fire-rating is per the rating of the ceiling and applicable

junction box, not the SLD.

- Installer must ensure compatibility of fit, wiring and proper mounting in the electrical junction box. This includes all applicable national and local electrical and building codes.
- Proprietary Slot-N-Lock quick installation system for junction box installation
- T-bracket with Slot-N-Lock mounting tabs included

OPTIONAL - RECESSED HOUSING MOUNTING

- Accessory SLD6ACCKIT required for mounting in 5" and 6" enclosed recessed housings
- May be installed in IC recessed housings in direct contact with insulation

* **Note:** Not for use in recessed housings in direct contact with spray foam insulation. Refer to NEMA LSD 57-2013

- The SLD6 may be used with any 5 or 6 inch diameter recessed housing constructed of steel or aluminum with an internal volume that exceeds 107.9 in³.

LED

- Linear LED arrays are integrated in trim perimeter
- Color Temperature: 2700K, 3000K, 3500K, 4000K
- CRI options: 80 and 90
 - 90 CRI can be used for California Title 24 compliance/certified to Title 20
 - 80 CRI can be used to comply with California Title 24 Non-Residential Lighting Controls as a LED luminaire.

WARRANTY

Cooper Lighting provides a five year limited warranty on the SLD LED

Catalog #		Type
Project		
Comments		Date
Prepared by		

LED CHROMATICITY

- A tight chromaticity specification ensures LED color uniformity, sustainable Color Rendering Index (CRI) and Correlated Color Temperature (CCT) over the useful life of the LED
- LED chromaticity of 3 SDCM exceeds ENERGY STAR® color standards per ANSI.
- 90 CRI model features high color performance with R9 greater than 50
- Every Halo LED is quality tested, measured, and serialized in a permanent record to register lumens, wattage, CRI and CCT.
- Halo LED serialized testing and measurement ensures color and lumen consistency on a per-unit basis, and validates long-term product consistency over time

ELECTRICAL CONNECTIONS
Junction Box

- Compatible with 4" x 2-1/8" deep square boxes
- Supply Wire Adapter with LED quick connector included
- LED connector is a non-screwbase luminaire disconnect for tool-less installation

Optional - Recessed Housings

- Accessory SLD6ACCKIT required.
- LED connector is compatible with Halo 5" H550 Series and 6" H750, H2750 Series LED Housings
- LED Connector meets California Title-24 high-efficacy luminaire standard as a non-screw base

SLD6 1200 UNV
Series

Universal Voltage

SLD6128xxWHUNVJB

80CRI

2700K, 3000K, 3500K,
and 4000K

SLD6129xxWHUNVJB

90CRI

2700K, 3000K, 3500K,
and 4000K6" Surface LED
DownlightHigh Lumen 1200 Series
Universal Voltage
120V-277V

Suitable for
ceiling or wall
electrical junction boxes

ENERGY DATA

	80 CRI	90 CRI
Lumens (4000K models)	1215	1000
Input Voltage	120V-277V	120V-277V
Frequency	50/60 Hz	50/60 Hz
Input Current	0.12 A	0.12 A
Input Power	14.8 W	14.8 W
Efficiency (4000K models)	82 lm/W	68 lm/W
THD	≤ 20%	
Power Factor	≥ 0.90	
T Ambient	-30 - +40°C	
Sound Rating	Class A	

NOMENCLATURE

SLD612830WHUNVJB

612 = 6" SLD 1200 Series


8 = >80 CRI

30 = 3000K


WH = Matte White

UNV = Universal Voltage 120V-277V

JB = Junction Box Kit only



Refer to ENERGY STAR® Certified Products List.
Can be used to comply with California Title 24 Non-Residential Lighting Controls requirements as a LED Luminaire.



Refer to ENERGY STAR® Certified Products List.
Can be used to comply with California Title 24 High Efficacy requirements.
Certified to California Title 20 Appliance Efficiency Database.

LED DRIVER

- Driver is a 120V-277V universal voltage input, high efficiency, dimmable electronic power supply providing DC power to the LED arrays
- Driver features high power factor, low THD, and has integral thermal protection in the event of over temperature or internal failure
- Driver is replaceable if it should be required
- If dimming is not required the fixture may be operated from a switch

DIMMING - PHASE CONTROL

- Designed for continuous dimming capability to nominally 5% with many 120V Leading Edge (LE) and Trailing Edge (TE) Phase Control dimmers. (Dimmers with low end trim adjustment offer greater assurance of achieving 5% level.)
- Consult dimmer manufacturer for compatibility and conditions of use.
(Note some dimmers require a neutral in the wallbox.)


DIMMING - 0-10V

- Dimmable to 10% in typical operation with compatible 0-10V DC low voltage dimmers.

- 0-10V DC dimmers operate using two low voltage dimming wires (color coded violet and gray). The low voltage dimming wires are separate from the 120V AC or 277V AC power.
- Switching on/off is controlled via the line voltage (120V AC or 277V AC) power, and dimming is controlled via the 2-wire 0-10V DC low voltage wiring.

COMPLIANCE

- cULus Listed ceiling and wall
- cULus Damp Location listed ceiling and wall
- cULus Wet Location Listed, ceiling only (shower rated)
- Suitable for use in closets, compliant with NFPA® 70, NEC® Section 410.16 (A)(3) and 410.16 (C)(5)
- SLD may be used in compatible electrical junction boxes in direct contact with insulation including spray foam insulation
- With accessory SLD6ACCKIT, may be installed in IC recessed housings in direct contact with insulation (Not for use in recessed housings in direct contact with spray foam insulation. Refer to NEMA LSD 57-2013)
- EMI/RFI: meets FCC 47CFR Part 15 Class B limits, and is suitable for use in residential and commercial installations
- Airtight certified per ASTM E283 (not exceeding 2.0 CFM under 75 Pascals pressure difference)
- 90 CRI: Can be used to comply with California Title 24 High Efficacy requirements. Certified to California Title 20 Appliance Efficiency Database.
- 80 CRI: Can be used to comply with California Title 24 Non-Residential Lighting Controls requirements as a LED luminaire.
- Can be used for International Energy Conservation Code (IECC) and Washington State Energy Code high efficiency luminaire compliance
- ENERGY STAR® certified luminaire - consult ENERGY STAR® Certified Product List
- Contains no mercury or lead and RoHS compliant.
- Photometric testing in accordance with IES LM-79
- Lumen maintenance projections in accordance with IES LM-80 and TM-21

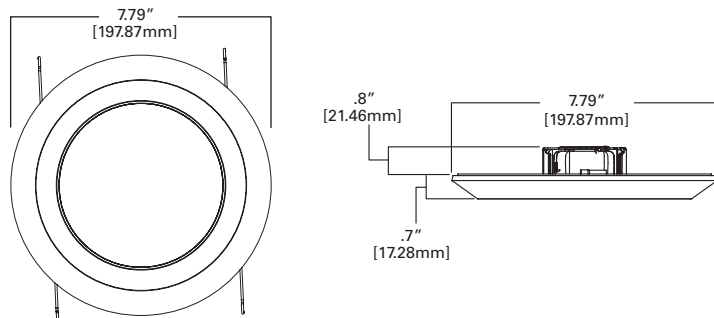DIMENSIONS**ORDERING INFORMATION**

SAMPLE NUMBER: SLD612927WHUNVJB SLD6TRMSN

Junction Box Installation: Order junction box separately, as supplied by others, to complete installation.

Recessed Installation: Order Halo recessed housing separately to complete installation.

Models	Color Rendering Index	Color Temperature (CCT)	Finish	Voltage	Junction Box
SLD612 = 6" Surface LED Downlight, 1200 Series	8 =80 CRI 9 =90 CRI	27 =2700K 30 =3000K 35 =3500K 40 =4000K	WH =White	UNV =Universal Voltage 120V-277V	JB =Junction Box Kit only
Accessories					
Designer Trims Fit over the SLD for a designer finish SLD6TRMSN =6" SLD Satin Nickel SLD6TRMTBZ =6" SLD Tuscan Bronze SLD6TRMWH =6" SLD White (paintable) *SLD accessory trims attach with permanent adhesion and are not interchangeable after installation J-Box Spacer Extension Ring Add 15/16" depth when SLD driver cannot fit into installed junction box SLD6EXT =6" Surface LED J-Box Extender, 9.5" O.D.			RAD Adapters When junction box is mounted flat on a ceiling or beam surface (not recessed in ceiling) SLD6RAD =6" SLD Round Surface J-Box Adapter, 7.92" O.D. (for 4-inch round or octagon junction boxes.) SLD6SADPLT =6" SLD Square Surface J-Box Adapter Plate (For 4-inch square junction boxes, use with SLD6RAD.) Hardware Kits SLD6ACCKIT =6" Accessory Parts Replacement Kit (Screwbase adapter, torsion springs, friction blades) SLD6BRKT =6" Junction Box Bracket & Screws Refer to SLD Accessories specification sheet for further information.		



SLD6 1200 UNV Series

Universal Voltage

SLD6128xxWHUNVJB

80CRI

2700K, 3000K, 3500K, and 4000K

SLD6129xxWHUNVJB

90CRI

2700K, 3000K, 3500K, and 4000K


6" Surface LED Downlight

High Lumen 1200 Series Universal Voltage 120V-277V

Suitable for ceiling or wall electrical junction boxes

COMPATIBLE WITH EATON'S CROUSE-HINDS 4" SQUARE JUNCTION BOXES

TP450
for non-metallic cable
4" x 4" x 2-1/8"
(102mm x 102mm x 54mm)




TP431†
for metal clad cable
4" x 4" x 2-1/8"
(102mm x 102mm x 54mm)

- **TP450** - for non-metallic cable
- **TP431** - for metal clad cable
- UL Listed
- Suitable for two-hour fire-rated ANSI/UL 263 when properly installed in a fire-rated ceiling or wall
- Refer to www.crouse-hinds.com

†UL approved for use with aluminum interlocking grounding metal clad cable, Type MCIA (Southwire MCAP™). MCAP™ is a registered trademark of Southwire Company.

COMPATIBLE WITH 4" SQUARE JUNCTION BOXES*

4" square deep steel box
4" x 4" x 2-1/8"
(102mm x 102mm x 54mm)



Compatible with other boxes when used with SLD6EXT extension spacer ring.

Surface mounting in a fire-rated ceiling using an appropriate electrical box offers a cost-effective alternative to fire-rated recessed housings.

Note: Fire-rating is per the rating of the ceiling and applicable junction box, not the SLD.

*This is a representative list of compatible junction boxes only. Information contained in this literature about other manufacturers' products is from published information made available by the manufacturer and is deemed to be reliable, but has not been verified. Eaton makes no specific recommendation on product selection and there are no warranties of performance or compatibility implied. Installer must determine that site conditions are suitable to allow proper installation of the SLD mounting bracket in the box.

PRODUCT DATA


Cat No.	CRI	CCT	Lumens	Power (W)	LPW
SLD612827WHUNVJB	80	2700	1100	14.8	74
SLD612830WHUNVJB	80	3000	1150	14.8	78
SLD612835WHUNVJB	80	3500	1200	14.8	81
SLD612840WHUNVJB	80	4000	1215	14.8	82
SLD612927WHUNVJB	92	2700	880	14.8	59
SLD612930WHUNVJB	92	3000	925	14.8	63
SLD612935WHUNVJB	92	3500	965	14.8	65
SLD612940WHUNVJB	92	4000	1000	14.8	68

Performance values are presented as typical for the model(s) indicated. Field results may vary.


SLD6128xxWHUNVJB
SLD6129xxWHUNVJB

LIGHTING FACTS®


SLD612827WHUNVJB - 80 CRI

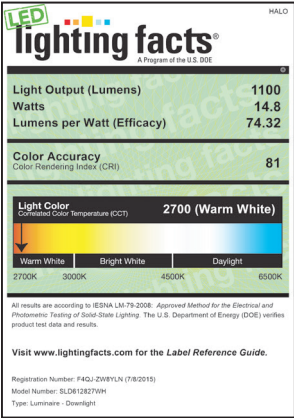


SLD612830WHUNVJB - 80 CRI

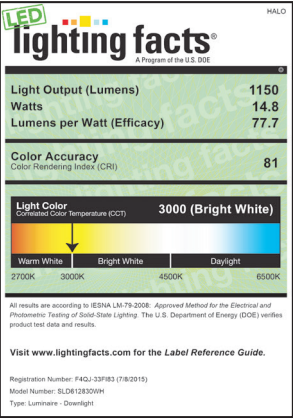


SLD612835WHUNVJB - 80 CRI

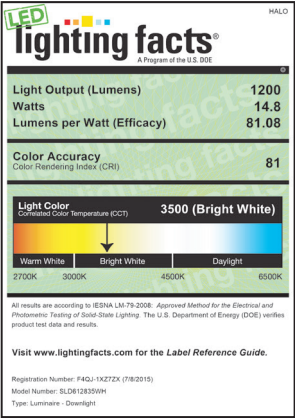


SLD612840WHUNVJB - 80 CRI

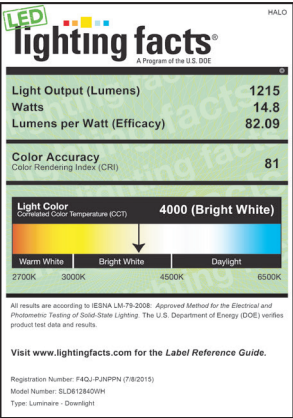


SLD612927WHUNVJB - 90 CRI

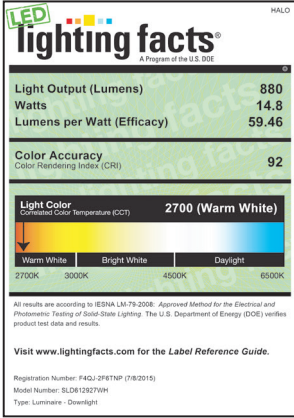

SLD612930WHUNVJB - 90 CRI

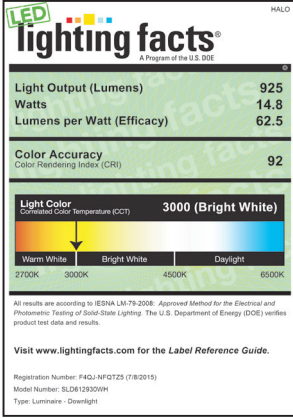

SLD612935WHUNVJB - 90 CRI

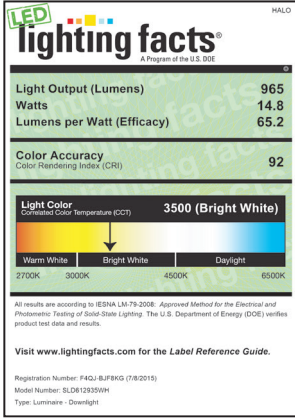

SLD612940WHUNVJB - 90 CRI

